

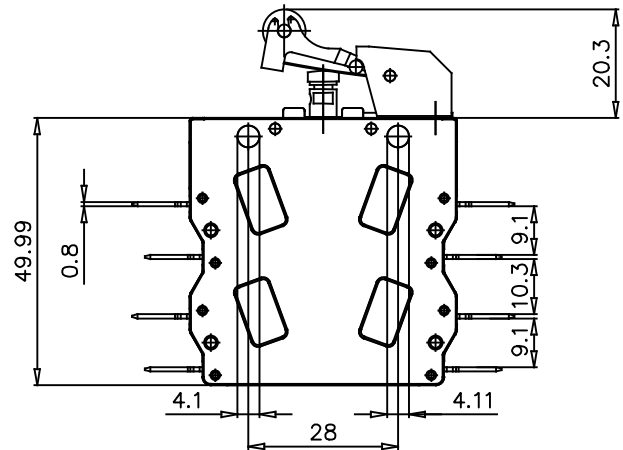



Only for Cod. SJ31-RNS00BY*

Galvanically isolated contact bridges POSITIVE OPENING

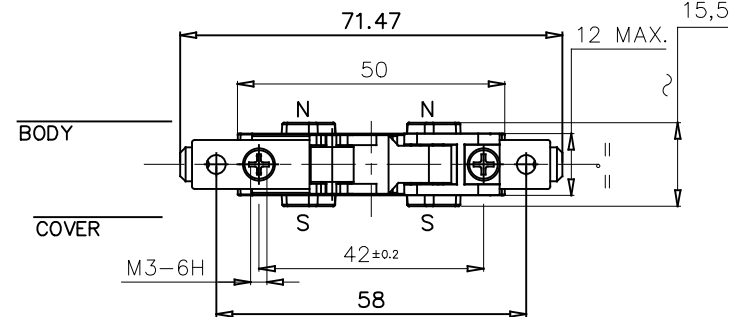

MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

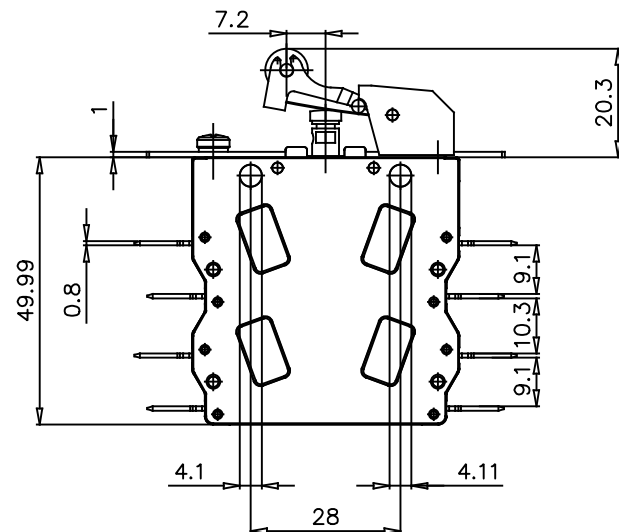

Only for Cod. SJ31-RDS00BY*

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ31-RNS00UY*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ31-RNG00UY*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ31-RNS00BY*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL

CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ31-RDS00UY*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ31-RDG00UY*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ31-RDS00BY*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL

CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

				MATERIALE	TRATTAMENTO
DATA	02/02/24	05/02/24	05/02/24	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA 1:1
FIRMA	DESIMONE MR	MR		MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	REVISIONE
DESCRIZIONE				SOSTITUISCE	
SNAP-ACTION MICROSWITCH SJ31 (2 N.O. + 2 N.C.) WITH OPERATION LEVER POSITIVE OPEN				COD. VEDI TABELLA	
				DIS.	
				IP10269Y	

SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA

##○##

SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE
1 Rev
09/09/25
MU

3 2 1 Rifer.
Funz.
Accop.
Cliente

ISOLEX
ISOLEX
Milano Italy

DESCRIZIONE
SNAP-ACTION MICROSWITCH SJ31 (2 N.O. + 2 N.C.) WITH OPERATION LEVER POSITIVE OPEN

F. 1
di 1
ACAD