


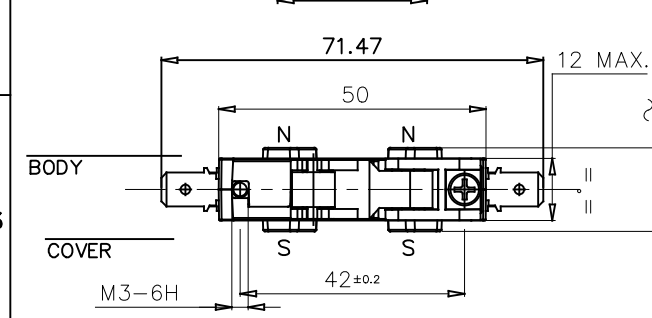
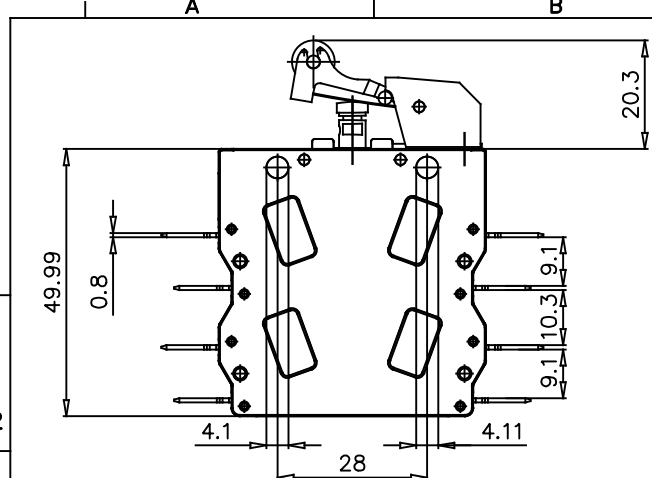




Galvanically isolated contact bridges

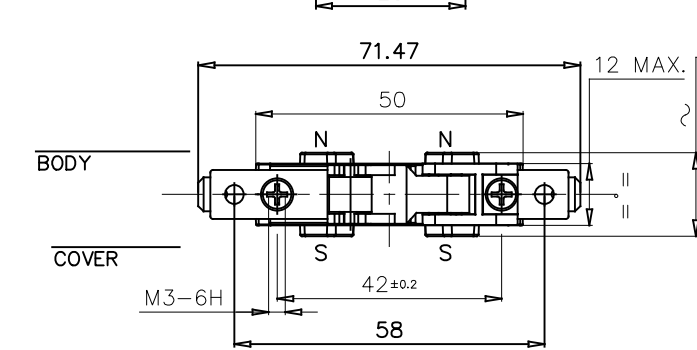

MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

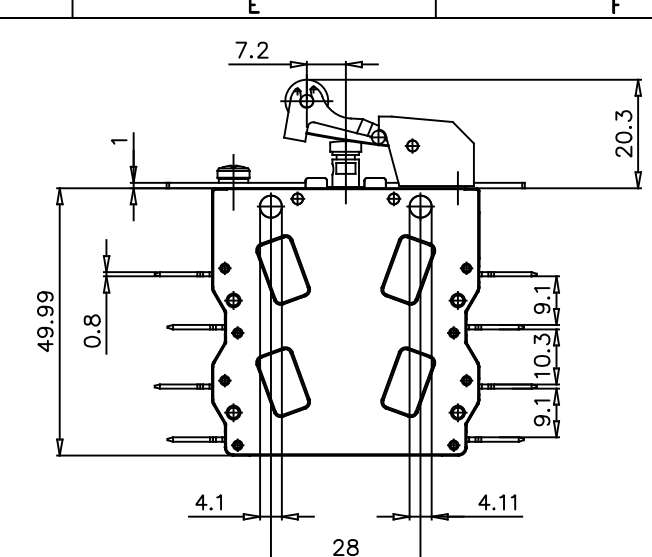

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ31-RNS00UW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ31-RNG00UW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ31-RNS00BW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ31-RDS00UW*	MICROSWITCH COMPLETE WITH LEVER - STD.TYPE CONTACTS
SJ31-RDG00UW*	MICROSWITCH COMPLETE WITH LEVER - GOLD PLATE CONTACTS
SJ31-RDS00BW*	MICROSWITCH COMPLETE WITH LEVER - WITH SOLID SILVER CONTACTS AND BLOWING MAGNETS

SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA

SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE	Rev.	09/09/25	MU
1			

				MATERIALE	TRATTAMENTO	
DATA	02/02/24	05/02/24	05/02/24	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA 1:1	SOSTITUISCE
FIRMA	DESIMONE MR	MR		MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	REVISIONE	
DESCRIZIONE				COD. VEDI TABELLA		
SNAP-ACTION MICROSWITCH SJ31 (2 N.O. + 2 N.C.) WITH OPERATION LEVER				DIS. IP10269		



ACAD