

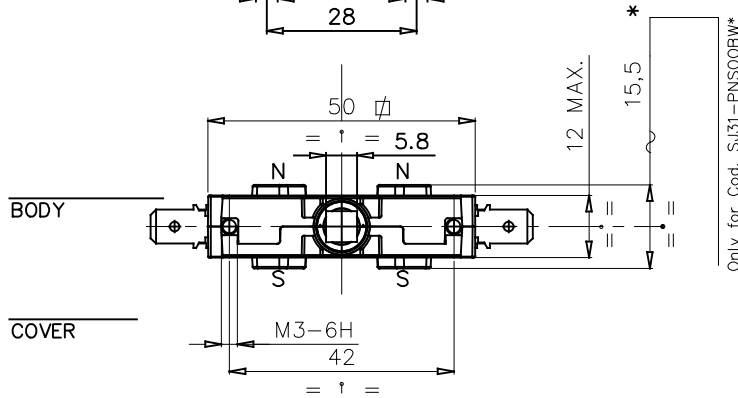




Galvanically isolated contact bridges

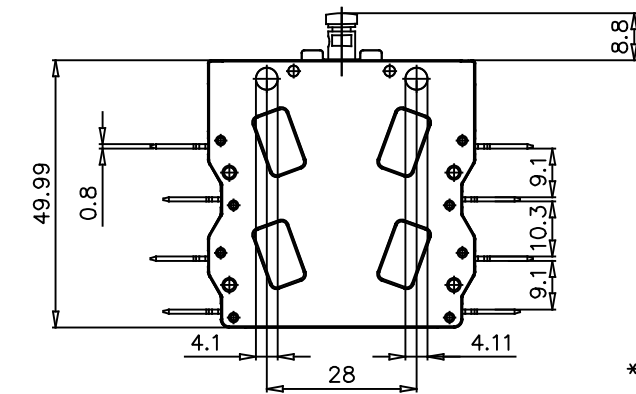

Only for Cod. SJ31-PNS00BW*



MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

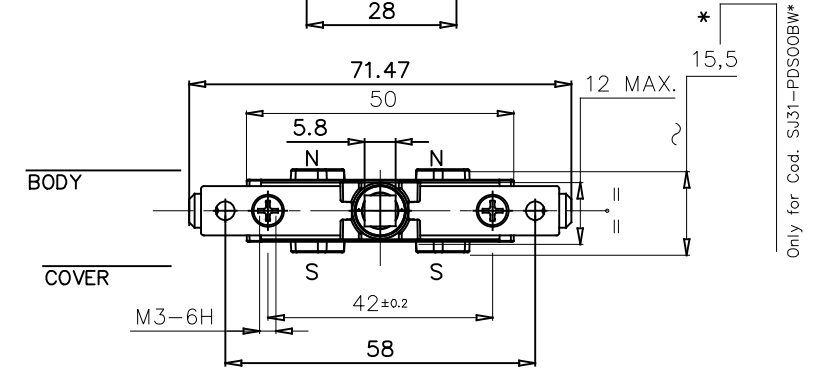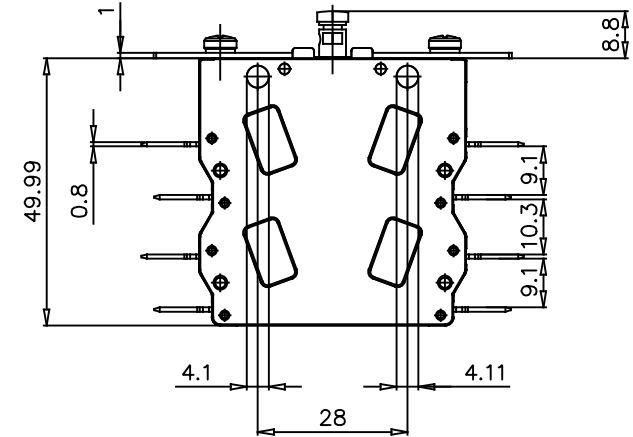

Only for Cod. SJ31-PDS00BW*

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ31-PNS00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ31-PNG00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ31-PNS00BW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ31-PDS00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ31-PDG00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ31-PDS00BW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

				MATERIALE	TRATTAMENTO
DATA	02/02/24	05/02/24	05/02/24	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA 1:1
FIRMA	DESIMONE MR	MR		MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	REVISIONE
				DESCRIZIONE	
				SNAP-ACTION MICROSWITCH SJ31 (2 N.O. + 2 N.C.)	
				COD. VEDI TABELLA	
				DIS.	
				IP10270	

SIMBOLI UTILIZZATI PER IDENTIFICARE LA QUOTA IN REVISIONE DI MODIFICA

##0##

SIMBOLO UTILIZZATO PER LE QUOTE SOGGETTE A CONTROLLO INTERNO

MODIFICHE
1 Rev
09/09/25
MU

3 2 1 Rifer.
Funz.
Accop.
Cliente

ISOLEX
ISOLEX
Milano Italy

ACAD