




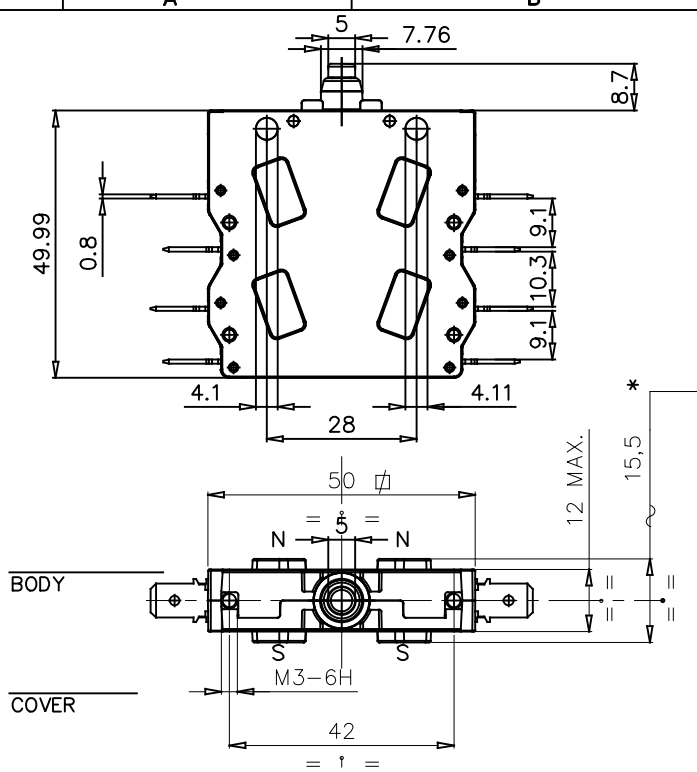

Galvanically isolated contact bridges
POSITIVE OPENING



MAX. OPERATING FORCE	N
RELEASE FORCE	N
REST POSITION	a mm
TRIPPING POSITION	a mm
RELEASE POSITION	a mm
OVER TRAVEL LIMIT	a mm

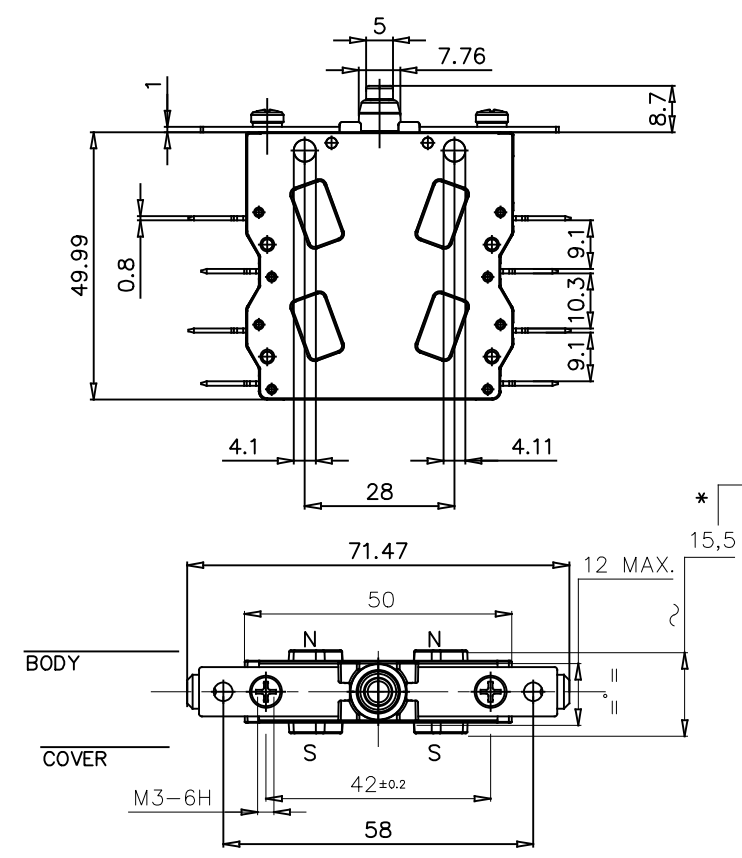

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ32-PNS00UY*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ32-PNG00UY*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ32-PNS00BY*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ32-PDS00UY*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ32-PDG00UY*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ32-PDS00BY*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

NOTE : 2 µm GOLDEN PLATING

MATERIALE			TRATTAMENTO				
DATA	05/02/24	05/02/24	05/02/24	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA 1:1	SOSTITUISCE	A3
FIRMA	DESIMONE MR	MR		MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	REVISIONE	1 2 3 4 5 6 7	
DESCRIZIONE				COD. VEDI TABELLA			
SNAP-ACTION MICROSWITCH SJ32 (2 N.O. + 2 N.C.) POSITIVE OPEN				DIS. IP10271Y			

MODIFICHE		Rifer.	
1	Rev 09/09/25 MU	Funz.	
		Accop.	
		Cliente	