



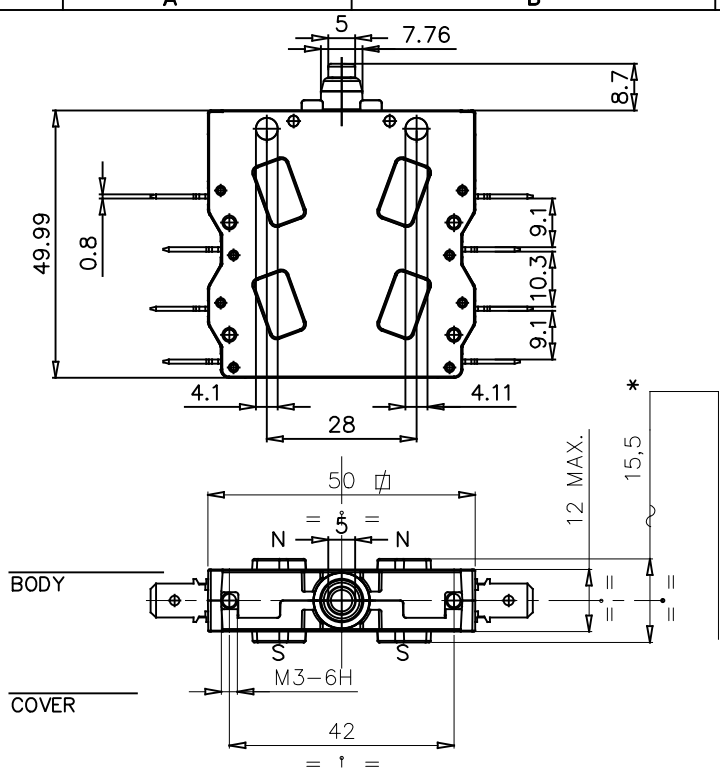


Galvanically isolated contact bridges



MAX. OPERATING FORCE	N 8,0±0,2
RELEASE FORCE	N 2,0
REST POSITION	a mm 8,8±0,2
TRIPPING POSITION	a mm 6,55±0,2
RELEASE POSITION	a mm 7,8±0,2
OVER TRAVEL LIMIT	a mm 5,3±0,1

Only for Cod. SJ32-PNS00BW*

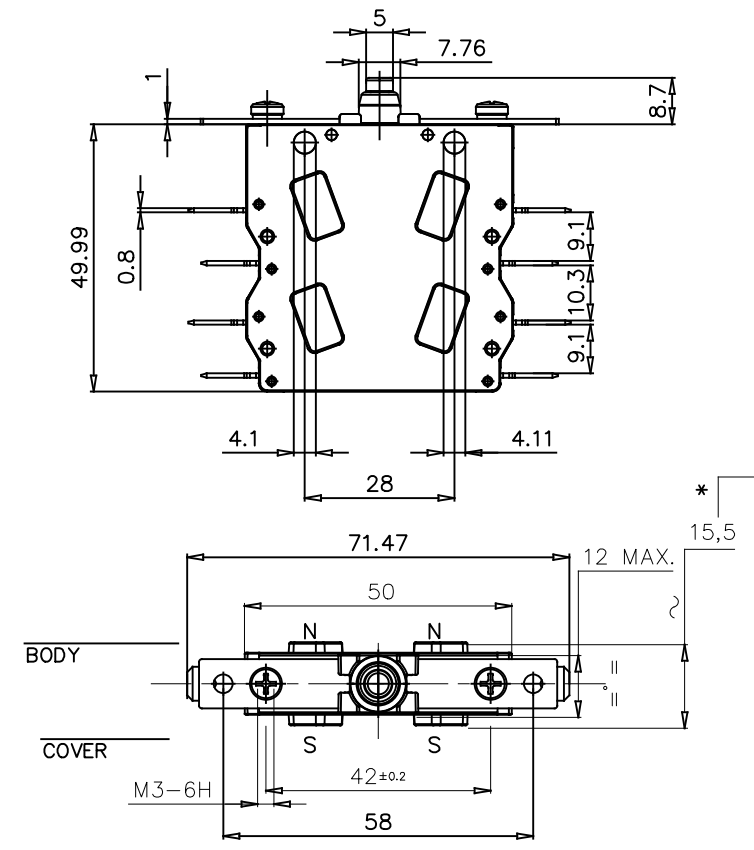

Only for Cod. SJ32-PDS00BW*

EXECUTIONS WITH FIXING DISTANCE 28 mm	
CODE	FEATURE
SJ32-PNS00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ32-PNG00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ32-PNS00BW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

NOTE : PLACE THE PERMANENT MAGNETS SO THAT THE POLARITIES ARE AS SHOWN IN THE DRAWING

NOTE : 2 µm GOLDEN PLATING

* COVER MATERIAL	
CODE LETTER	MATERIAL
C	PC
N	PA66
P	PEI

EXECUTIONS WITH FIXING DISTANCE 58 mm	
CODE	FEATURE
SJ32-PDS00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - STD.TYPE CONTACTS
SJ32-PDG00UW*	MICROSWITCH COMPLETE WITH PUSH BUTTON - GOLD PLATE CONTACTS
SJ32-PDS00BW*	MICROSWITCH COMPLETE WITH PUSH BUTTON; SOLID SILVER CONTACTS AND BLOWING MAGNETS

			MATERIALE	TRATTAMENTO	
DATA	05/02/24	05/02/24	05/02/24	TOLLERANZE PER DIMENSIONI LINEARI ED ANGOLARI PRIVE DI INDICAZIONI DI TOLLERANZE SPECIFICHE UNI EN 22768-1	SCALA 1:1
FIRMA	DESIMONE	MR	MR	MOLTO GROSSOLANA GROSSOLANA MEDIA FINE	SOSTITUISCE
			DESCRIZIONE		COD. VEDI TABELLA
			SNAP-ACTION MICROSWITCH SJ32 (2 N.O. + 2 N.C.)		DIS.
					IP10271

MODIFICHE		Rifer.	
1	Rev 09/09/25 MU	Funz.	
		Accop.	
		Ciente	



ACAD